
230v Indoor Ceiling Recessed PIR Occupancy Switch

Designed for flush mounting through suspended or plasterboard ceilings

Up to 70% Energy Savings

Saves energy and money: By ensuring lights are turned off automatically when room is empty. **Convenient:** No more fumbling in the dark as the PIR will turn the lights on for you automatically **Ideal for:** Factories, Hotels, Schools, Offices, Toilets, Kitchens, Corridors, Pubs & Clubs, Houses, Garages etc



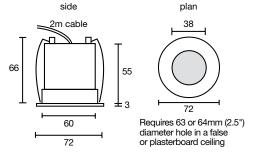

Order Code: PIR/D/REC 72mm diameter

Specification

Detection Zone: 360°

Time lag range: 10 seconds to 40 minutes in 9 steps

Photocell range: 30 to 1000 lux, and inactive

Loading: Up to 6 amps (1500W) of resistive loads.

Up to 6 amps (1500W) of fluorescent loads.

Up to 3 amps (750W) of electronic and wire wound transformer loads.

Up to 2 amps (500W) of CFL, 2D lamps, LED Drivers and LED lamps and fittings.

Up to 1 amp (250W) of fans.

Minimum Load: 2W resistive, suitable for most energy saving lamps, LED's, contactors and emergency fittings

Dimensions: 72mm diameter x 68mm

Pre-wired: They have a 2m cable, for quick installation

Options

PIR/D/REC/SEALED Only available in 230v option. Protects against light splashes and condensation when


installed in the ceiling. Ideal for bathrooms, shower rooms, etc.

PIR/D/REC/24V 24v model. Please specify whether 24vAC or 24vDC is required PIR/D/REC/12V 12v model. Please specify whether 12vAC or 12vDC is required


Wiring Diagrams

If required, several PIRs can be wired in parallel to control the same load.

Wiring diagram: Single presence detector

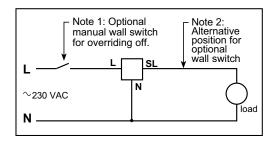



Wiring diagram: Multiple presence detectors

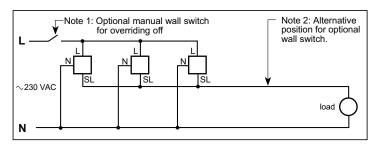

Detection

PIR Quad detector gives 124 detection areas within the zone

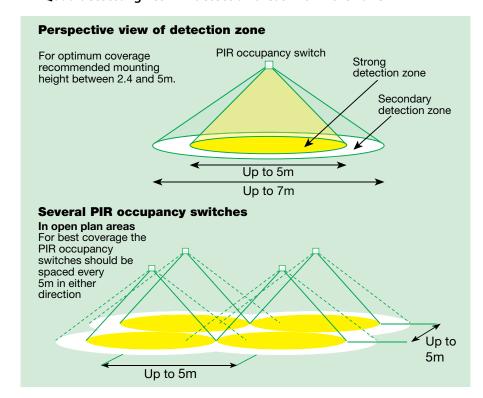

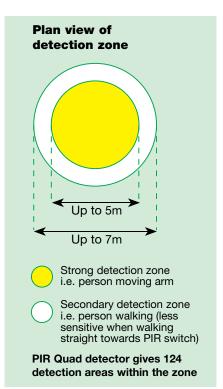



ROBERT PEARSON & COMPANY LTD

Post Office House, Post Office Lane Stockton, Warminster Wiltshire BA12 OSE

Telephone: (01985) 850954 Facsimile: (01985) 850112 E-Mail: sales@robertpearson.co.uk Website: www.robertpearson.co.uk