Wall Mounted 230v Indoor PIR Occupancy Switch


Can be mounted on optional square pattress box

Up to 70% Energy Savings

Saves energy and money: By ensuring lights are turned off automatically when room is empty.

Convenient: No more fumbling in the dark as the PIR will turn the lights on for you automatically Ideal for: Factories, Hotels, Schools, Offices, Toilets, Kitchens, Corridors, Pubs & Clubs, Houses, Garages etc





Order Code: PIR/D/WM

Specification

Detection Zone: 360°

Time lag range: 10 seconds to 40 minutes in 9 steps

Photocell range: 30 to 1000 lux, and inactive

Loading: Up to 6 amps (1500W) of resistive loads.

Up to 6 amps (1500W) of fluorescent loads.

Up to 3 amps (750W) of electronic and wire wound transformer loads.

Up to 2 amps (500W) of CFL, 2D lamps, LED Drivers and LED lamps and fittings.

Up to 1 amp (250W) of fans.

Minimum Load: 2W resistive, suitable for most energy saving lamps, LED's, contactors and emergency fittings

Dimensions: $86 \times 86 \times 22$ mm. Requires back box depth 16mm

Options

PIR/D/WM-NN No neutral model c/w manual override off switch. Maximum usage 12 hours per 24hr period.

Minimum load 40W resistive or 100W inductive, or for wiring in parallel 50W resistive or 120W


inductive per PIR/D/WM-NN in the circuit.

PIR/D/WM/24V 24v model. Please specify whether 24vAC or 24vDC is required 12v model. Please specify whether 12vAC or 12vDC is required


Wiring Diagrams

If required, several PIRs can be wired in parallel to control the same load.

Wiring diagram: Single presence detector

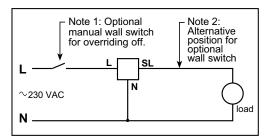



Wiring diagram: Multiple presence detectors

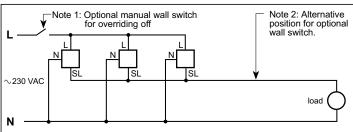

Detection

PIR Quad detector gives 124 detection areas within the zone

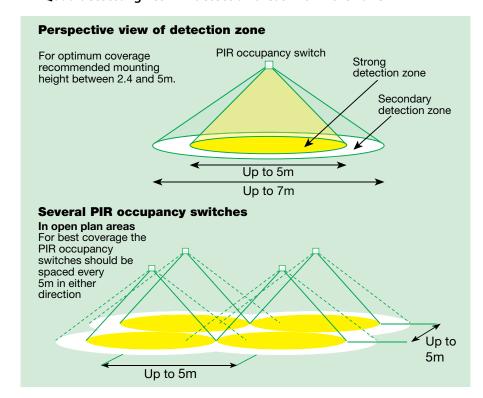

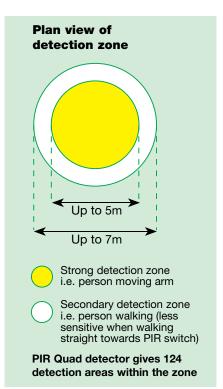



ROBERT PEARSON & COMPANY LTD

Post Office House, Post Office Lane Stockton, Warminster Wiltshire BA12 OSE

Telephone: (01985) 850954 Facsimile: (01985) 850112 E-Mail: sales@robertpearson.co.uk Website: www.robertpearson.co.uk