

# BATH SENSOR CONTROLS

## "No touch" hygienic sensor operation

Simply put your hand within 50mm of the sensor to turn water on. Turns water off automatically after use

You can choose your own bath spout or one of ours. Sensor is fitted remotely.

## Waterproof TPTS Model Brushed Stainless Steel Bath Sensor Kits

### Waterproof brushed stainless steel bath sensor c/w 8 metre cable



#### Mains-powered

water pressure 0.5 Bar – 6 Bar

Bath Order Code:

#### TPTS-M/HP/1 Bath Sensor kit

- 1 no. Mains-powered bath control box
- 1 no. 15mm Plastic 12V solenoid valve
- 1 no. Waterproof sensor c/w 45mm steel bezel

## Brushed Stainless Steel AV Bath Sensor Kits



For applications that require separate hot and cold supplies per bath please use our colour coded anti-vandal Sensors. Steel thread sensor—ideal for custodial and mental health applications.

#### Mains-powered

water pressure 0.5 Bar – 6 Bar

Order Codes:

#### TPTS-M/HP/1 Bath AV Sensor Kit

- 1 no. Mains-powered bath control box
- 1 no. 15mm Plastic 12V solenoid valve
- 1 no. Steel AV Sensor (specify colour)

#### TPTS-M/HP/2 Bath AV Sensor Kit

- 1 no. Mains-powered tap control box
- 2 no. 15mm Plastic 12V solenoid valve
- 1 no. Stainless Steel AV Sensor (c/w red indicator) to denote hot water
- 1 no. Stainless Steel AV Sensor (c/w blue indicator) to denote cold water

#### Battery-powered

water pressure 0.75 Bar – 10 Bar

Order Codes:

#### TPTS-B/HP/1 Bath AV Sensor Kit

- 1 no. Battery-powered tap control box
- 1 no. 15mm G202 6V solenoid valve
- 1 no. Steel AV Sensor (specify colour)

#### TPTS-B/HP/2 Bath AV Sensor Kit

- 1 no. Battery-powered tap control box
- 2 no. 15mm G202 6V solenoid valve
- 1 no. Stainless Steel AV Sensor (c/w red indicator) to denote hot water
- 1 no. Stainless Steel AV Sensor (c/w blue indicator) to denote cold water

You can use our TPTS model AV bath sensor kits to control your own spouts or choose our spouts (pictured above with our ALN-DM ligature resistant deck-mounted range of brushed steel bath spouts from our vandal resistant and/or anti-ligature spouts

## Electronic brushed steel Bath Touchpad Switch kits – Lightly press the touchpad switch to turn water on



Blue for cold water



Red for hot water

#### Mains Powered (0.5 Bar - 6 Bar)

#### TPTS-M/HP/1 Bath Touchpad kit

- 1 no. Mains-powered bath control box
- 1 no. 15mm Plastic 12V solenoid valve
- 1 no. Touchpad switch (specify colour)

#### TPTS-M/HP/2 Bath Touchpad kit

- 1 no. Mains-powered bath control box
- 2 no. 15mm Plastic 12V solenoid valve
- 2 no. Touchpad switch: 1 red, 1 blue

#### Battery Powered (0.75 Bar - 10 Bar)

#### TPTS-B/HP/1 Bath Touchpad kit

- 1 no. Battery-powered bath control box
- 1 no. 15mm G202 6V solenoid valve
- 1 no. Touchpad switch (specify colour)

#### TPTS-B/HP/2 Bath Touchpad kit


- 1 no. Battery-powered bath control box
- 2 no. 15mm G202 6V solenoid valve
- 2 no. Touchpad switch: 1 red, 1 blue

# BATH SENSOR CONTROLS—TECHNICAL


## Control Box

You can also set the system so you can activate the sensor once to turn the water on and then activate the sensor again to override the pre-set time and turn the water off immediately. It is possible to use 1 No. sensor to control 2 No. solenoid valves using a single control box.

**Mains Bath Control Box:** with adjustable valve open time from 1 minute to 10 minutes. You need to provide a 3 amp fused spur.

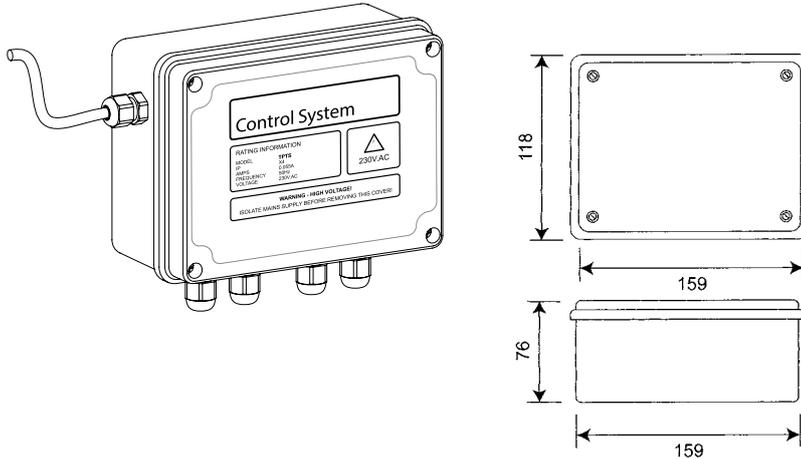

**Battery Bath Control Box:** with adjustable valve open time from 1 minute to 10 minutes.

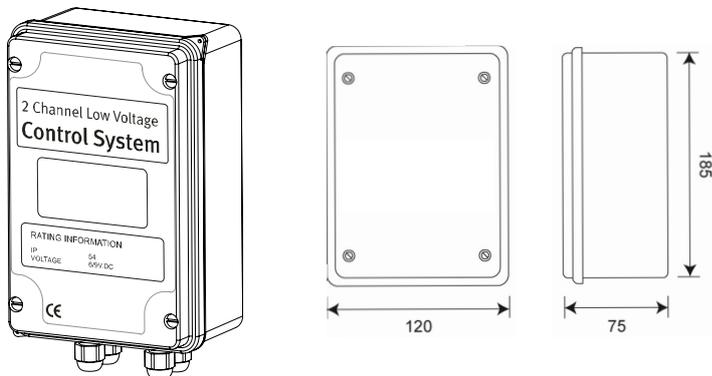


## Sensor / Touchpad

Anti-Ligature & Vandal Resistant:  
Ideal for custodial/mental health/  
public & commercial applications.


**Please note:** Make sure there are no lights shining (or being reflected) directly into the sensor as this can make the sensor false trigger.

### Waterproof 45mm sensor

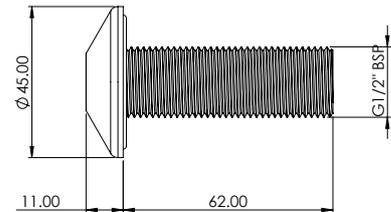

Bezel diameter ..... Ø45mm  
Overall length ..... 73mm  
Thread ..... ½" BSP  
Thread length ..... 62mm  
Thread material ..... Brass  
Pre-wired ..... YES  
Cable length ..... 8m standard  
Finish ..... Brushed steel

### AV Sensor / Touchpad Switch

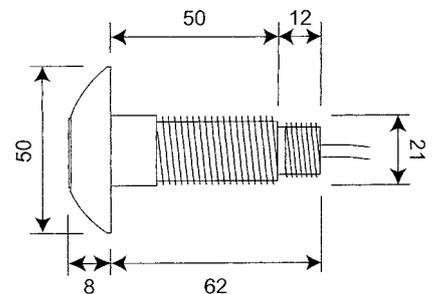

Bezel diameter ..... Ø50mm  
Overall length ..... 70mm  
Thread length ..... 50mm  
Thread material ..... Stainless Steel  
Pre-wired ..... YES  
Cable length ..... 3m standard  
Finish ..... Brushed Steel  
Insert colour ..... Plain  
Red (denotes hot)  
Blue (denotes cold)

### Extension Thread

Order Code	For Wall Thickness
Extn100MM	up to 100mm
Extn150MM	up to 150mm
Extn250MM	up to 250mm




## WRAS approved Solenoid Valves for Bath Controls

Please specify correct solenoid valves for your pipe diameter: For  $\varnothing 22\text{mm}$  copper pipe, replace HP with HP  $\frac{3}{4}$ " in bath order codes.

### For mains powered kits Standard high pressure (HP) 0.5 Bar – 6 Bar

12v pre-wired 15mm nylon solenoid valve for mains powered kits.

Working Temperature Range  $0^{\circ}\text{C}$  to  $60^{\circ}\text{C}$   
Electrical connection: Spade connectors /  
2-core  $\varnothing 0.5\text{mm}$  copper cable



#### ORDER CODE

15mm 12v Plastic HP Valve

#### TECHNICAL DATA

Gross weight ..... 0.215 kg  
Material ..... Nylon  
Seal Material ..... NBR (Nitrile)  
Voltage ..... 12vDC  
Power ..... 3W  
Connection ..... 15mm compression  
Pressure rating ..... 0.5 Bar – 6 Bar  
Operation type ..... Normally closed  
Cable length ..... 3m

### For mains powered kits Optional high pressure (HP $\frac{3}{4}$ " ) 0.5 Bar – 8 Bar

12v (19mm orifice) brass solenoid valve for mains powered kits.

You will need to provide length of 2 core cable from valve to control box.

#### ORDER CODE

$\frac{3}{4}$ " 12v Valve (TPTS-M)


#### TECHNICAL DATA

Material ..... Brass  
O-ring/washers ..... Nitrile  
Pressure rating ..... 0.5 Bar – 8 Bar max.  
Orifice ..... 19mm  
Connection .....  $\frac{3}{4}$ " BSP  
Voltage ..... 12vDC  
Operation type ..... Normally closed

### For battery powered kits Standard high pressure (HP) 0.75 Bar – 10 Bar

6v non-wired G202 brass solenoid valve for battery powered kits.

You will need to provide length of 2 core cable from valve to control box.



#### ORDER CODE

15mm 6v G202 Valve

#### TECHNICAL DATA

Material ..... Brass  
O-ring/washers ..... Nitrile  
Pressure rating ..... 0.75 Bar – 10 Bar  
Orifice ..... 12.7mm  
Connection ..... 15mm compression  
Voltage ..... 6vDC  
Operation type ..... Latching

### For battery powered kits Optional high pressure (HP $\frac{3}{4}$ " ) 0.5 Bar – 8 Bar

6v (19mm orifice) solenoid valve for battery powered kits.

You will need to provide length of 2 core cable from valve to control box.

#### ORDER CODE

$\frac{3}{4}$ " 6v Valve (TPTS-B)

#### TECHNICAL DATA

Material ..... ABS/Brass  
O-ring/washers ..... Nitrile  
Pressure rating ..... 0.5 Bar – 8 Bar  
Orifice ..... 19mm  
Connection .....  $\frac{3}{4}$ " BSP  
Voltage ..... 6vDC  
Operation type ..... Latching



## ROBERT PEARSON & COMPANY LTD

Post Office House, Post Office Lane  
Stockton, Warminster  
Wiltshire BA12 0SE

Telephone: (01985) 850954  
Facsimile: (01985) 850112

E-Mail: [sales@robertpearson.co.uk](mailto:sales@robertpearson.co.uk)  
Website: [www.robertpearson.co.uk](http://www.robertpearson.co.uk)